

SPECIFICATION OF R6H SERIES

APPLICATIONS

The R6H type wide-band chokes are mainly used in the PC boards to filter the EMI from the outsides

* High performance medium current DC power and signal filtering





ORDERING CODE

N7B R6H 6 x 10 x 0.85 - 1.5Ts
 (1) (2) (3) (4)

- (1) MATERIAL
- (2) PRODUCT CODE
- (3) SIZE CODE
- (4) TURNS WOUND





SHAPE

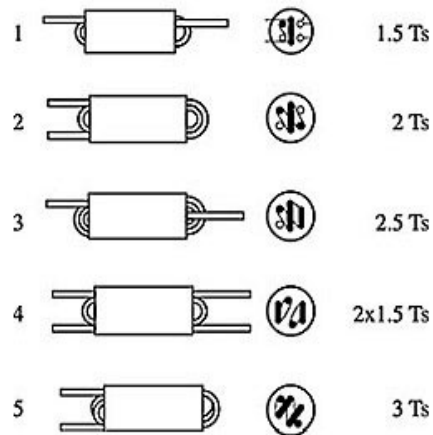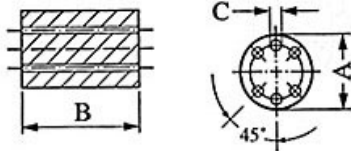

DIMENSIONS & CHARACTERISTICS

UNIT:mm

NO.	ORDERING CODE	A	B	C	Winding
1	R6H 6x10x0.85-1.5Ts	6.00±0.25	10.00±0.40	0.85±0.20	φ0.5*1.5Ts
2	R6H 6x10x0.85-2Ts	6.00±0.25	10.00±0.40	0.85±0.20	φ0.5*2Ts
3	R6H 6x10x0.85-2.5Ts	6.00±0.25	10.00±0.40	0.85±0.20	φ0.5*2.5Ts
4	R6H 6x10x0.85-2x1.5Ts	6.00±0.25	10.00±0.40	0.85±0.20	φ0.5*1.5Ts*2P
5	R6H 6x10x0.85-3Ts	6.00±0.25	10.00±0.40	0.85±0.20	φ0.5*3Ts

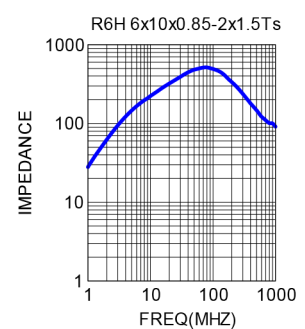


HaoHuaKe Technology Co., Ltd. Tel:0755-2101 7581 QQ: 2606 3546 22
 302, factory building No.1, fangmapu Xinfang street, Guihua community, Longhua District, Shenzhen, China

E-mail: hkh_shenzhen@126.com

Web Site: <http://www.haohuake.cn>

SPECIFICATION OF R6H SERIES



HaoHuaKe Technology Co., Ltd. Tel:0755-2101 7581 QQ: 2606 3546 22
302, factory building No.1, fangmapu Xinfang street, Guihua community, Longhua District,
Shenzhen, China

E-mail: hk_shenzhen@126.com

Web Site:
<http://www.haohuake.cn>