

SPECIFICATION OF HXC SERIES

FEATURES

1. High impedance for common mode noise and low impedance for differential mode signal.
2. Large rated current available.
3. Wide band or sharp type impedance cure available.
4. SMD or DIP available.



APPLICATIONS

Prevention of common mode noise on signal Lines and power lines for computer related or electronic products.

ORDERING CODE


H X C 12 70 - 01
 (1) (2) (3) (4) (5) (6)

- (1) MATERIAL CODE
- (2) CORE TYPE
- (3) S : SMD , C : CAPPED SMD , D : DIP
- (4) MAX BASE DIMENSION(mm)
- (5) MAX HEIGHT(ABOVE PCB IN mm)
- (6) DESIGN CODE

DIMENSIONS & CHARACTERISTICS

UNIT:mm

ORDERING CODE	A	B	C	D	WINDING	WIRING	Z +/-25% (Average) (Ω)	RATED CURRENT (mA)	RDC (Ω)max
HXC1060-01	10.0	4.0	10.0 max	6.0 max	φ0.35*4.5TS*2	1-2,3-4	512/90MHz	4000	0.035
HXC1270-01	12.5	6.0	12.0 max	7.5 max	φ0.35*6.5TS*2	1-4,2-3	981/60MHz	4000	0.022
HXC1270-03	12.5	6.0	12.0 max	7.5 max	φ0.35*6.5TS*2	1-4,2-3	451/100MHz	2500	0.050

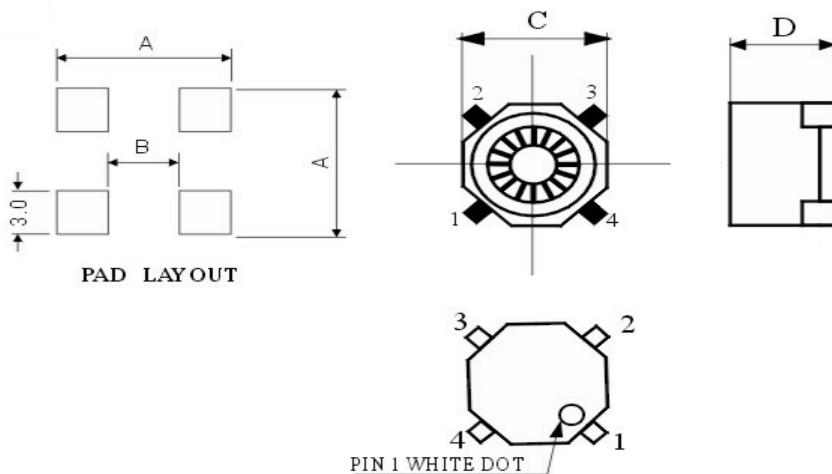

HaoHuaKe Technology Co., Ltd. Tel:0755-2101 7581 QQ:2606 3546 22
 302, factory building No.1, fangmapu Xinfang street, Guihua community, Longhua District, Shenzhen, China

E-mail: hhk_shenzhen@126.com

Web Site: <http://www.haohuake.cn>

SPECIFICATION OF HXC SERIES

