

# SPECIFICATION OF SH SERIES

## APPLICATIONS

- \* Filtering of power input pins or oscillators or logic devices using high speed docks
- \* Filtering of low frequency input/output signal entering / exiting shielded enclosures
- \* High frequency filtering of medium speed docks and video signals.
- \* Preventing oscillation in high frequency amplifiers

## ORDERING CODE

$\frac{N7B}{(1)} \quad \frac{S8H}{(2)} \quad \frac{11.2}{(3)} \times \frac{11.2}{(4)} \times \frac{10.2}{(5)}$

- (1) MATERIAL
- (2) PRODUCT CODE
- (3) A DIM.
- (4) B DIM.
- (5) C DIM.



## SHAPE




FIG 1

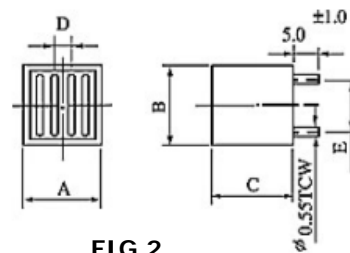


FIG 2




FIG 3





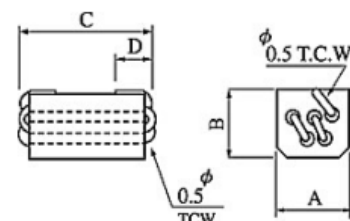


FIG 4

## DIMENSIONS & CHARACTERISTICS

UNIT:mm

NO.	ORDERING CODE	A	B	C	D	E	Fig
1	S5H 5x4.6x5.5	5.00±0.25	5.00 max	8.00 max	2.00 min	-	4
2	S5H 5x4.6x8.5	5.00±0.25	5.00 max	11.00 max	3.50 max	-	4
3	S6H 7.6x5x8	7.60±0.25	5.00±0.20	8.00±0.25	2.54±0.10	2.54±0.10	1
4	S6H 7.6x5x10	7.60±0.25	5.00±0.20	10.00±0.25	2.54±0.10	2.54±0.10	1
5	S8H 10.2x6x2.6	10.20±0.30	6.00±0.20	2.60±0.15	2.54±0.10	2.54±0.10	3
6	S8H 11.2x11.2x10.2	11.20±0.30	11.20±0.30	10.20±0.25	2.54±0.10	7.62±0.20	2

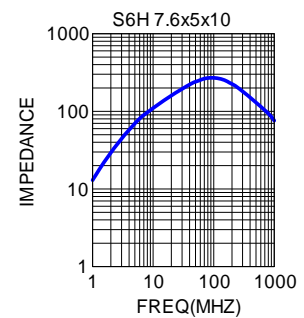

HaoHuaKe Technology Co., Ltd. Tel:0755-2101 7581 QQ:2606 3546 22  
 302, factory building No.1, fangmapu Xinfang street, Guihua community, Longhua District,  
 Shenzhen, China

E-mail: hhk\_shenzhen@126.com

Web Site:  
<http://www.haohuake.cn>

# SPECIFICATION OF SH SERIES

